


# CS-64/74FMW/H

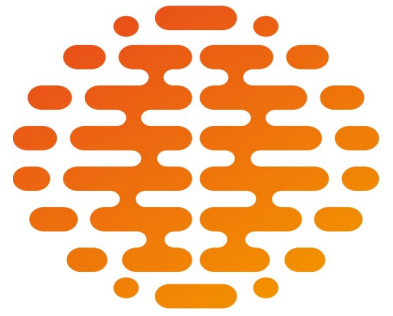

CS-64/74FMW/H

**New Handset Version** of The CS-64/74FM This Metal Station is an ideal solution for LMR applications in work areas where the PTT Handset is needed for privacy or where loud background noise prohibits normal voice communication. The unit comes standard with a TH-3 PTT Handset, Handset hook switch on a side mount.

## Technical Specifications

### Channels

- 4 SIP Lines (Channels)
- 4 Multicast Channels

### Call Types

- SIP Radio Conferencing
- SIP Private Line (Point to Point / Ringdown)
- Group Calls / point to point intercom
- Push to Talk Broadcast

### Mode of Operation

- Auto Answer / Auto Dial.
- Point to Point without SIP Server.
- Manual—Dial/Answer.
- Manual-Answer Only.

### Interfaces


- PTT Handset with Cradle
- CB Style Microphone with Clip
- Headset with PTT Belt Pack
- PTT Foot Pedal
- (1) Ethernet Port

### Dimensions

- Width - 5.375" / 137mm
- Depth - 1.625" / 41.3mm
- Height of Desk model 5" / 127mm
- Weight - 2.1 lbs. / 525 g
- Speaker 2.5" (63.5 mm) Dia. 5 Watts @ 8 Ohm

### Codec Options (bandwidth including overhead)

- |                 |           |
|-----------------|-----------|
| ■ G.711 a/u-law | 80 kbit   |
| ■ G.729         | 20 kbit   |
| ■ Speex         | 4-15 Kbit |

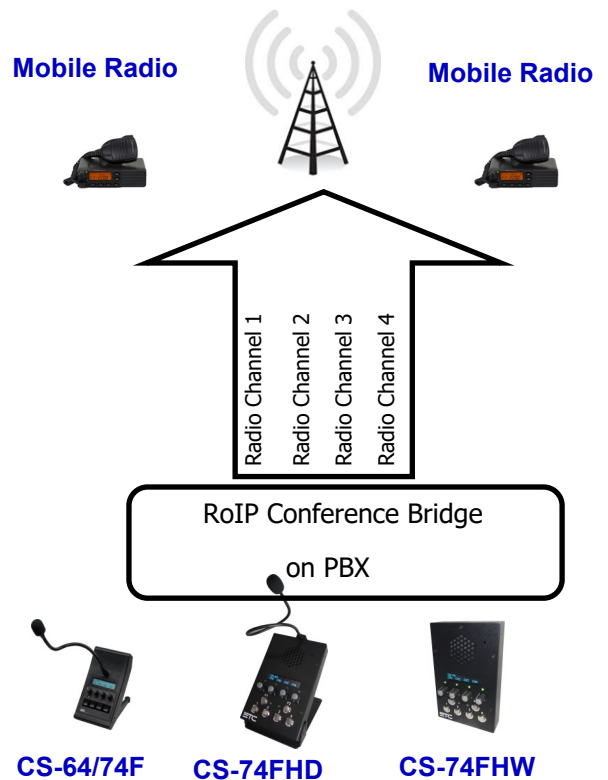

### Management

- Browser based, Internet Explorer, Google Chrome
- Upgradeable application firmware via file upload
- Supports HTTP & HTTPS (Self signed certificates)

### Power

- 48 VDC, 1/2 A, External PoE Injector
- 48 VDC, IEEE 802.3af, Alt A & B, Power over Ethernet

### Thermal

- 3 Watts
- 10 BTU/Hr
- Cooling - Ambient air

### Network Requirements

- 100 Base T (full duplex)
- IEEE 802.3af (PoE) compliant
- Protocols - UDP, DHCP, DNS, Syslog, NTP, SSH, TCP